

Triple Drill Milling and Reinforcement Steel Screwdriver


DE 4060 / DE 4070



DE 4060




DE 4070



- Screwing force and point are adjustable.



- Practical height adjustment with rotating mechanical support plates.
- Hydropneumatical system to enable fine and smooth triple drilling of profiles together with reinforcement steel.




- Centering device and manual measurement system combined in one design.
- Screwing and drilling operations are made independently at the same time.




General Features

- DE 4060 opens handle and espagnolette holes on PVC sash profiles together with reinforcement steel.
- DE 4070 screws reinforcement steel, opens handle and espagnolette holes on PVC sash profiles together with reinforcement steel.
- Adjustable drill moving speed.
- Profile detection switch prevents working without profile.
- Motors move independently through selection button.

DE 4060

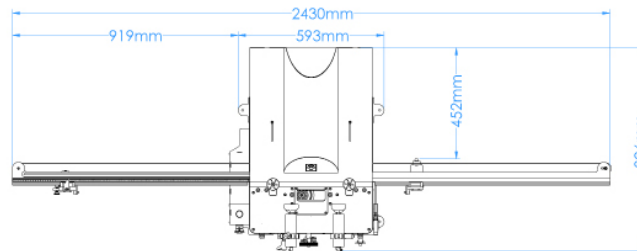

DE 4070

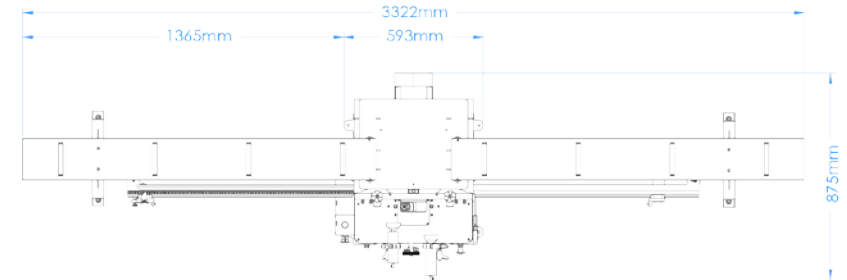

Optional Equipments



• VD 100 Screwing Unit



• MR 100 Multiple Support Plate Centering Unit

<p>H: 1950 mm</p>	<p>400 V L1-L2-L3-N-PE 50 / 60 Hz 1.7 kW</p>	<p>300 kg</p>	<p>6-8 Bar 35 l / Cycle</p>	<p>ØD: 11 mm x 2 ØD: 13 mm</p>	<p>ØD: 12 mm 2800 rpm</p>	<p>A: 80 mm B: 30 mm</p>	<p>S: 3.5 - 4.2 mm K: 6.3 - 8.1mm L: 15 - 40mm Yük. Kap. 0.7 kg</p>
-------------------	--	---------------	---------------------------------	------------------------------------	-------------------------------	------------------------------	---

- The product has patented features.